



## PRODUCT SPECIFICATION

---

### CHROMIX FLOOD



---

## INTRODUCTION

---

The Chromix Flood is our second generation high power colour changing RGBW DMX compatible floodlight designed to highlight architectural features both internally and externally with colour washing effects. With a marine grade paint finish the Chromix Flood is suitable for both inland and coastal areas while the lens design ensures accurate light distribution in either 8° or 40° beam angles.

The Chromix Flood incorporates a modular design allowing up to three heads to be mounted on a dedicated bracket, each of which can be individually pivoted providing the versatility to produce multiple directions of light from a single installation point.

**UK  
CA** CE IP65 IK06 230V

---

### APPLICATION

---

- Exterior
- Parking / Exterior

---

### SPECIFICATION

---

#### CONSTRUCTION

- Housing: Extruded aluminium
- Finish: Polyester powder painted RAL 9006 matt grey, marine grade salt spray tested
- Endcaps: High pressure die cast aluminium
- Diffuser: 5mm toughened glass
- Lens: Injection moulded PMMA lens
- IP65
- IK06

#### EMERGENCY

- Not available with emergency

#### CONTROL

- RGBW Colour Changing
- DMX dimming only

#### INSTALLATION

- Suitable for surface installation
- Suitable for external surface installation

#### VARIATIONS

- Available in a range of lens options offering multiple beam angles

### IMAGES


#### PRODUCT IMAGES



### PROJECT IMAGES




Image courtesy of ECS Ltd

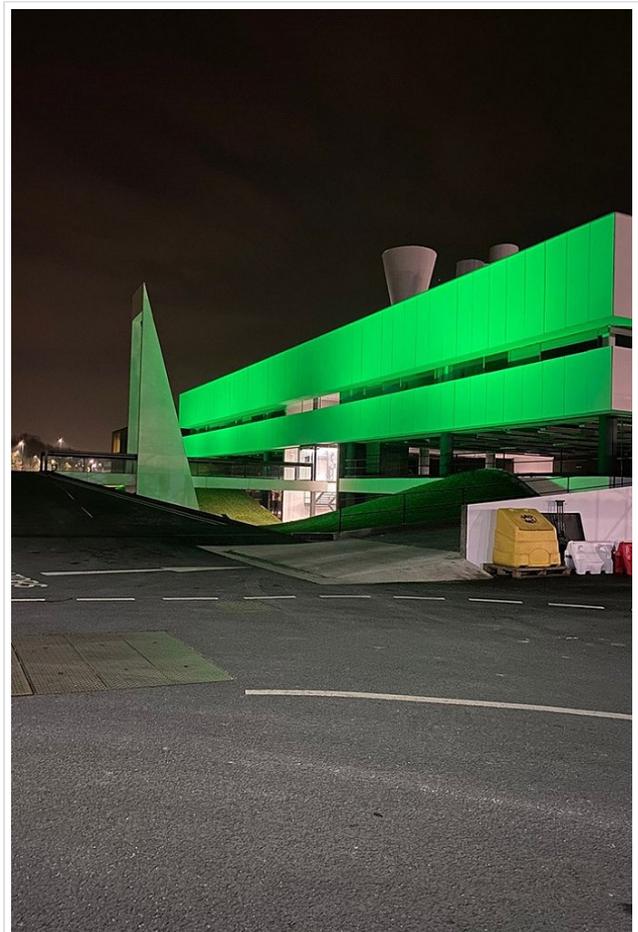

Images courtesy of North Tyneside Council




Images courtesy of North Tyneside Council

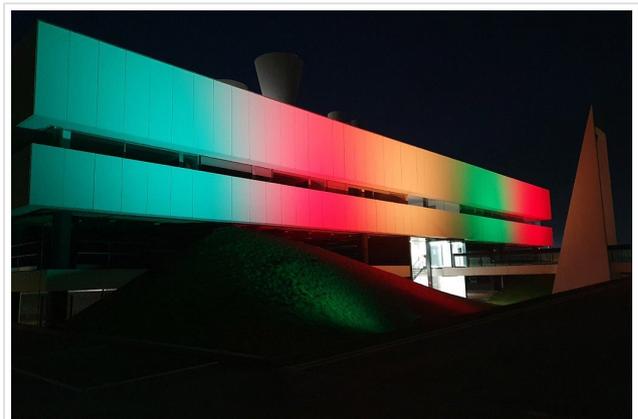

Images courtesy of North Tyneside Council

**TECHNICAL**

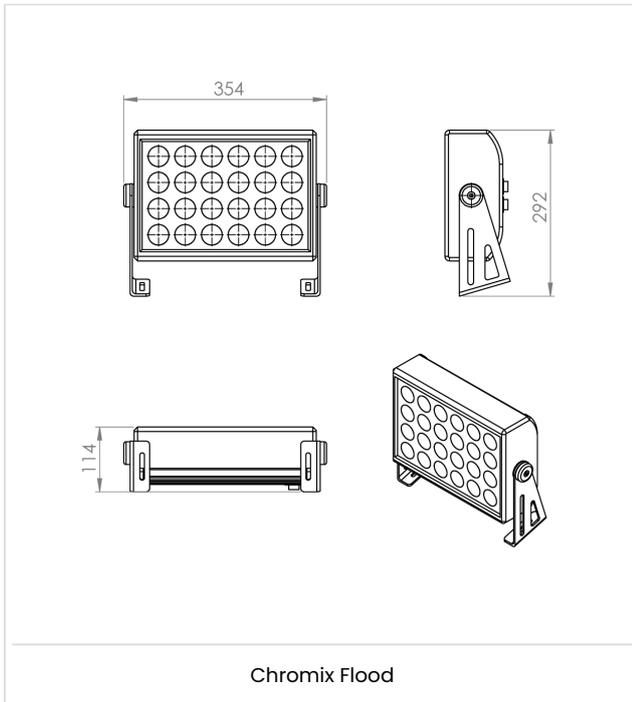

---

## WARRANTY

---

At Dextra our commitment to service has been at the forefront throughout our history spanning more than forty years in the UK lighting market. Our service ethos extends beyond design and delivery, we believe supporting your installation throughout the warranty period is equally crucial, whilst the strength and longevity of Dextra Group provides peace of mind that our warranty will be supported throughout.

The Dextra range is supplied with a five year warranty commencing from the date of delivery. During the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years drivers, emergency modules, wireless modules, sensors and LED circuits will be supplied free of charge to replace defective components, labour and other associated costs are not included.

Certain ranges and components are subject to exemptions:

- ▶ Lithium batteries are provided with a five year warranty. During the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years replacement batteries will be supplied free of charge to replace defective components. Five year warranty became effective as of 03/02/25, Lithium emergency luminaires supplied prior to this date are supported with a three year on site warranty only. Labour and other associated costs are not included. Nickel Metal Hydride and Nickel Cadmium batteries are provided with a one year warranty for parts and labour.
- ▶ Emergency luminaires including AME2, EXI LED, EXI3, HBE3, HBE4, OAT2 LED and Twinspace are supplied with a one year warranty for parts and labour. Lithium variants suffixed with the 5YR part code, the Autotest emergency with the LA3 part code and wireless variants with LA3RC or LSTR part codes are supplied with a five year warranty. For these extended warranty variants for the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years replacement batteries will be supplied free of charge to replace defective components.
- ▶ Protec Micro, PTECF7 Fire Rated Downlights, Serenus and the Opus Sconce are provided with a five year replacement luminaire only warranty. Protec FR Fire Rated Downlights are provided with a 2 year replacement luminaire only warranty.
- ▶ Controls systems such as standalone sensors, switches, marshalling boxes and cabling are provided with a one year warranty for both parts and labour. DALI control systems are provided with a two year warranty for both parts and labour.
- ▶ LEDextra ranges are supplied with a three year parts or replacement luminaire only warranty with the exception of the IMPR RGBW, the Runway RGBW, the MOD RGBW, Tanek RGBW and the DexRing. These five ranges are supplied with our standard five year warranty during which defects within the first three years will be repaired on site and the warranty includes both parts and labour. For the final two years free of charge replacement components only will be supplied to rectify any failures but labour and other associated costs are not included.
- ▶ LEDEX ranges are supplied with a three year replacement luminaire only warranty.
- ▶ The Decorative Pendant ranges, Bebo, Dene, Nova, Fino and Stix are supplied with a 3 year replacement luminaire only warranty.

All warranties are subject to correct use of the product and will be invalidated by misuse, for example incorrect installation, unsuitable environmental conditions or incorrect maintenance. It is the duty of the customer to ensure that all the fault lies with the luminaire prior to requesting replacement parts or site repairs. In the event that no defect is found with the product our costs for attending site will be recharged to the customer and credit

will not be issued against returned products. No consequential losses incurred resulting from any defect with our product will be reimbursed.

Given the nature of LED technology a small percentage of LEDs may fail during the lifetime of a luminaire, this does not cause a reduction in lumen output. As such LED luminaires are only deemed to be faulty for warranty purposes when in excess of ten percent of LEDs have failed in a single luminaire.

On site repair of products under warranty will be undertaken during normal working hours, 9am to 5pm Monday to Friday, and will require unrestricted access to luminaires. Where required Dextra will provide access equipment to carry out repairs at height, should luminaires have been installed in locations where reasonable provision for maintenance access has not been made we reserve the right to supply replacement product only. On site warranty repairs will only be undertaken on the mainland of the UK and Ireland, in all other locations replacement product only will be provided.

**If you require any assistance with regards to our products please contact our Customer Services department on 01747 858100.**

### ORDER CODES

#### LUMINAIRE

Code	Description	Power	Luminous Flux
CHF 100 0808 RGBW MG	Chromix Flood RGBW C84, RDM DMX, Single Bracket, 8 Degree, IP65, IK06, RAL9006	107.9W	781lm Red, 1,235lm Green, 453lm Blue, 1,268lm White, 3,737lm RGBW
CHF 100 4040 RGBW MG	Chromix Flood RGBW C84, RDM DMX, Single Bracket, 40 Degree, IP65, IK06, RAL9006	108.8W	746lm Red, 1,166lm Green, 437lm Blue, 1,202lm White, 3,511lm RGBW

Also available in static white in a range of colour temperatures. Please contact LEDextra for further information.

220-240V / 50-60Hz

IP65

IK06



**Terminal Labelling:**

**Power**

L1 Switched Live  
E Earth  
N Neutral

**Emergency**


L2 Unswitched Live  
DA/AT3 DALI Autotest  
DALI Autotest

**Dimming**

-/D1/DA Analogue/DSI/DALI  
+/D2/DA Analogue/DSI/DALI  
L3 Switch Dim /  
Corridor Function


**WARNING:** Luminaire must be earthed. Risk of electric shock from LED boards if operated with cover removed. Installation / operation outside of luminaires intended scope invalidates warranty. Suitable only for domestic / light industrial / industrial applications within the scope of EN55015. Tested to compliance with BSEN 60598: specification for general requirements and tests. Must be installed by a suitably qualified person in accordance with all relevant legislation. Ambient operating temperature of 0°C to 25°C. If maximum operating temperature is exceeded luminaire will automatically dim / switch off. Terminal blocks are rated to 16A unless stated otherwise. The light source is non replaceable. **LUMINAIRES WITH EMERGENCY PACK:** When supply is isolated battery output terminals may be live if battery is connected. Isolate mains and battery before servicing. Emergency luminaires require unswitched live connection taken from same phase as switched supply. When unswitched supply is connected status indicator illuminates green, when unswitched supply is disconnected indicator extinguishes and luminaire operates in emergency mode. 24 hour charge period required before undertaking full discharge test. Emergency test sheets provided should be used to record all emergency tests. Batteries should be replaced when 3 hour duration is not met. Excessive switching of permanent live may result in premature battery failure. Battery electrolyte can be harmful to eyes / open wounds, do not puncture, if electrolyte touches skin / eyes flush with water. Do not incinerate batteries.

1.

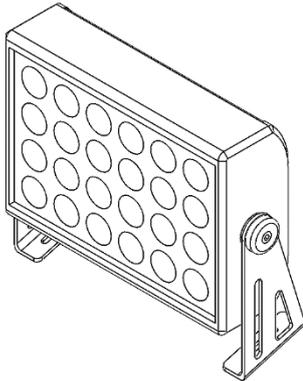


Fitting will come complete and ready to install.

2.

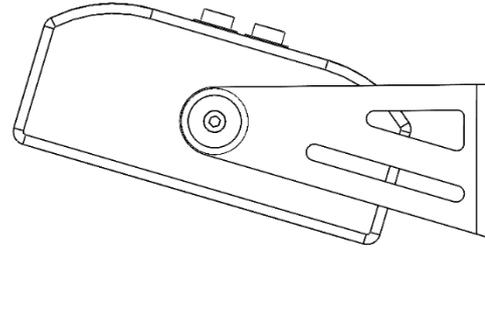


Secure the bracket to a suitable mounting surface.

3.

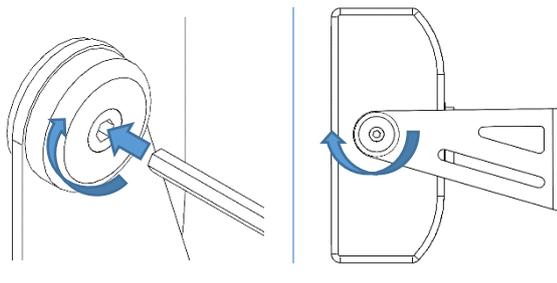


To adjust the angle of the bracket, use an Allen key to loosen the hex bolts on the sides. Retighten these bolts once at the desired angle.

4.

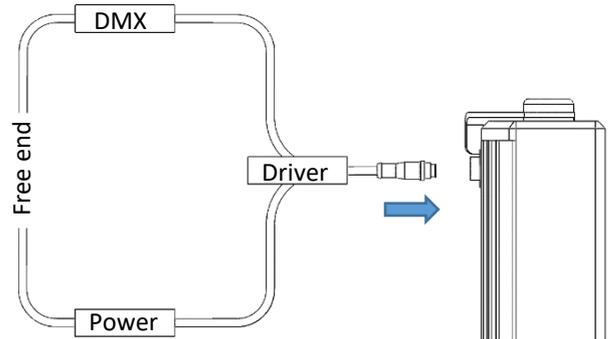


Connect the first fitting to the driver. Then establish a connection with the free end of the cable.

5.

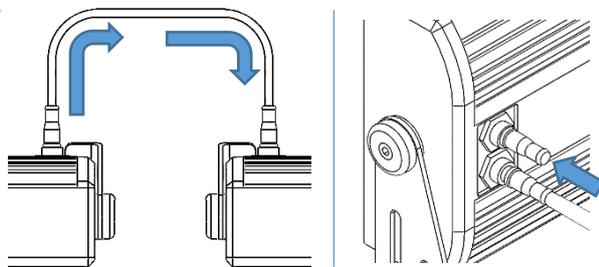

Connect to the next fitting in a daisy chain. **Consult supplier regarding maximum number of fixtures allowed to be connected in a daisy chain.** Use a blanking plug on the last fitting in the chain.

6.

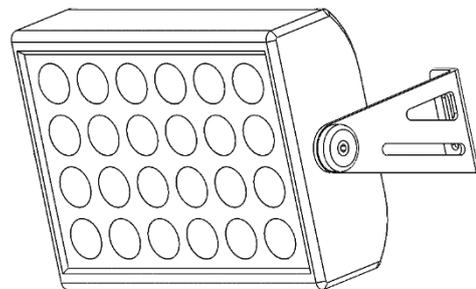

Installation is now complete.