



PRODUCT SPECIFICATION

OPUS SCONCE



INTRODUCTION

The Opus Sconce is ideally suited to external applications such as entrances, walkways or to highlight architectural features. The Opus Sconce is available in a range of lumen outputs and two housing styles, either bi directional or single directional which can be installed to provide up or downlight effects. Manufactured with a die cast aluminium housing and toughened glass cover the Opus Sconce is both well engineered to suit the rigours of an external environment and designed to complement a wide range of building exteriors with matt grey or black paint finishes.

**UK
CA** CE IP65 IK08

APPLICATION

- Commercial / Offices
- Education
- Exterior
- Healthcare / Social Housing
- Hotel / Leisure
- Retail

SPECIFICATION

CONSTRUCTION

- Housing: High pressure die cast aluminium
- Finish: Matt black
- Finish: Matt grey
- Diffuser: 4mm toughened glass
- IK08
- IP65

PERFORMANCE

- Bi-Directional 50% up 50% down
- Up to 91 luminaire lumens per circuit Watt.

ENVIRONMENTAL

- Every luminaire is labelled with a unique ID number allowing easy identification of spare parts for the lifetime of the product.
- UK based manufacturing providing local support throughout the product lifetime and minimising transportation miles.

EMERGENCY

- Not available with emergency

CONTROL

- Fixed output only.

INSTALLATION

- Suitable for external surface installation

VARIATIONS

- Available in a range of lumen outputs
- Available in grey or black finishes

IMAGES

PRODUCT IMAGES



PROJECT IMAGES



Everton in the Community - The Peoples Place, using the Opus Sconce in Black





Everton in the Community - The Peoples Place, using the Opus Sconce in Black



Everton in the Community - The Peoples Place, using the
Opus Sconce in Black

TECHNICAL

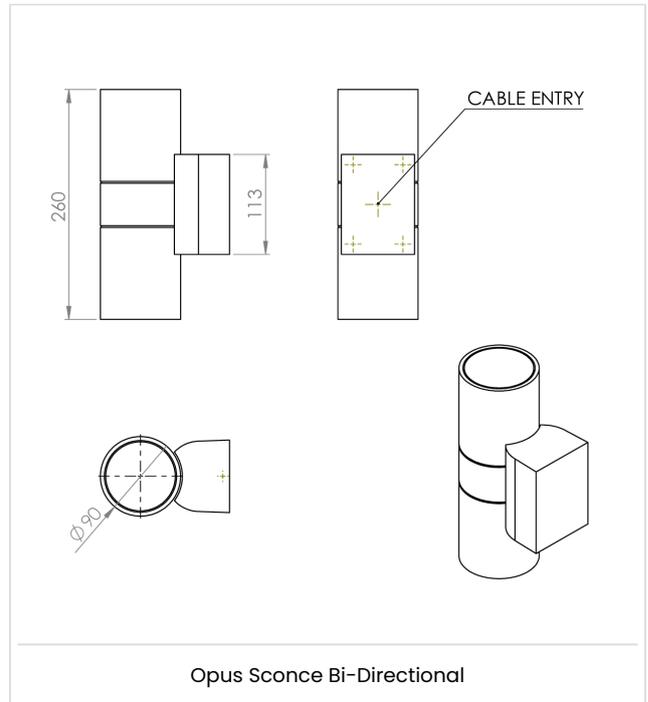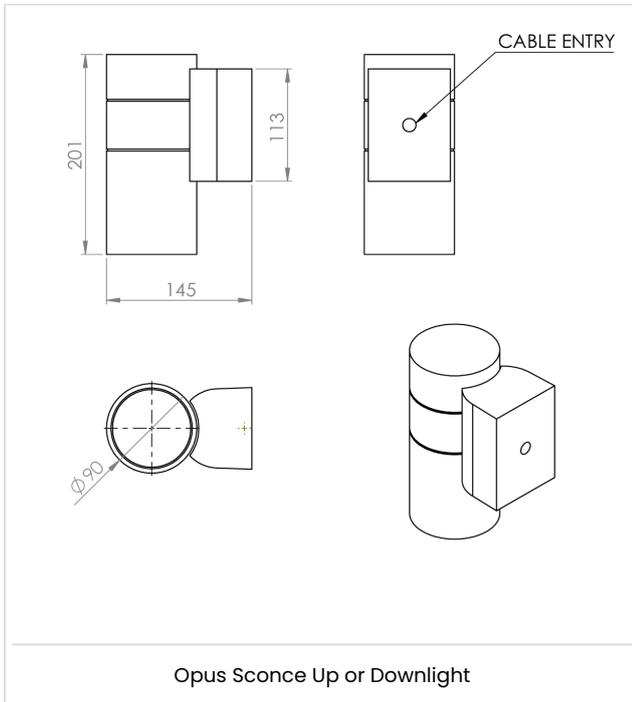

WARRANTY

At Dextra our commitment to service has been at the forefront throughout our history spanning more than forty years in the UK lighting market. Our service ethos extends beyond design and delivery, we believe supporting your installation throughout the warranty period is equally crucial, whilst the strength and longevity of Dextra Group provides peace of mind that our warranty will be supported throughout.

The Dextra range is supplied with a five year warranty commencing from the date of delivery. During the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years drivers, emergency modules, wireless modules, sensors and LED circuits will be supplied free of charge to replace defective components, labour and other associated costs are not included.

Certain ranges and components are subject to exemptions:

- ▶ Lithium batteries are provided with a five year warranty. During the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years replacement batteries will be supplied free of charge to replace defective components. Five year warranty became effective as of 03/02/25, Lithium emergency luminaires supplied prior to this date are supported with a three year on site warranty only. Labour and other associated costs are not included. Nickel Metal Hydride and Nickel Cadmium batteries are provided with a one year warranty for parts and labour.
- ▶ Emergency luminaires including AME2, EXI LED, EXI3, HBE3, HBE4, OAT2 LED and Twinspace are supplied with a one year warranty for parts and labour. Lithium variants suffixed with the 5YR part code, the Autotest emergency with the LA3 part code and wireless variants with LA3RC or LSTR part codes are supplied with a five year warranty. For these extended warranty variants for the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years replacement batteries will be supplied free of charge to replace defective components.
- ▶ Protec Micro, PTECF7 Fire Rated Downlights, Serenus and the Opus Sconce are provided with a five year replacement luminaire only warranty. Protec FR Fire Rated Downlights are provided with a 2 year replacement luminaire only warranty.
- ▶ Controls systems such as standalone sensors, switches, marshalling boxes and cabling are provided with a one year warranty for both parts and labour. DALI control systems are provided with a two year warranty for both parts and labour.
- ▶ LEDextra ranges are supplied with a three year parts or replacement luminaire only warranty with the exception of the IMPR RGBW, the Runway RGBW, the MOD RGBW, Tanek RGBW and the DexRing. These five ranges are supplied with our standard five year warranty during which defects within the first three years will be repaired on site and the warranty includes both parts and labour. For the final two years free of charge replacement components only will be supplied to rectify any failures but labour and other associated costs are not included.
- ▶ LEDEX ranges are supplied with a three year replacement luminaire only warranty.
- ▶ The Decorative Pendant ranges, Bebo, Dene, Nova, Fino and Stix are supplied with a 3 year replacement luminaire only warranty.

All warranties are subject to correct use of the product and will be invalidated by misuse, for example incorrect installation, unsuitable environmental conditions or incorrect maintenance. It is the duty of the customer to ensure that all the fault lies with the luminaire prior to requesting replacement parts or site repairs. In the event that no defect is found with the product our costs for attending site will be recharged to the customer and credit

will not be issued against returned products. No consequential losses incurred resulting from any defect with our product will be reimbursed.

Given the nature of LED technology a small percentage of LEDs may fail during the lifetime of a luminaire, this does not cause a reduction in lumen output. As such LED luminaires are only deemed to be faulty for warranty purposes when in excess of ten percent of LEDs have failed in a single luminaire.

On site repair of products under warranty will be undertaken during normal working hours, 9am to 5pm Monday to Friday, and will require unrestricted access to luminaires. Where required Dextra will provide access equipment to carry out repairs at height, should luminaires have been installed in locations where reasonable provision for maintenance access has not been made we reserve the right to supply replacement product only. On site warranty repairs will only be undertaken on the mainland of the UK and Ireland, in all other locations replacement product only will be provided.

If you require any assistance with regards to our products please contact our Customer Services department on 01747 858100.

ORDER CODES

LUMINAIRE

Code	Description	Power	Llm/W
OPUSCO L08 GY	Opus Sconce, Up or Downlight, 60° Reflector, 865lm, Grey, Colour 84	9.9W	87
OPUSCO L08 BL	Opus Sconce, Up or Downlight, 60° Reflector, 865lm, Black, Colour 84	9.9W	87
OPUSCO L16 GY	Opus Sconce, Bi-Directional, 60° Reflector, 1730lm, Grey, Colour 84	19.1W	91
OPUSCO L16 BL	Opus Sconce, Bi-Directional, 60° Reflector, 1730lm, Black, Colour 84	19.1W	91

MISCELLANEOUS

Code	Description
C83	Colour 83

220-240V / 50-60Hz
IP65 IK08


Terminal Labelling:

Power	
L/L1	Switched Live
E	Earth
N	Neutral
Emergency	
L2/2	Unswitched Live
DA/AT3	DALI Autotest
DA/AT3	DALI Autotest
Dimming	
-/D1/DA	Analogue/DSI/DALI
+/D2/DA	Analogue/DSI/DALI
SD	Switch Dim / Corridor Funct




WARNING: Luminaire must be earthed. Risk of electric shock from LED boards if operated with cover removed. Installation / operation outside of luminaires intended scope invalidates warranty. Suitable only for domestic / light industrial / industrial applications within the scope of EN55015. Tested to compliance with BSEN 60598: specification for general requirements and tests. Must be installed by a suitably qualified person in accordance with all relevant legislation. Ambient operating temperature of 0°C to 25°C. If maximum operating temperature is exceeded luminaire will automatically dim / switch off. Terminal blocks are rated to 16A unless stated otherwise. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. **LUMINAIRES WITH EMERGENCY PACK:** When supply is isolated battery output terminals may be live if battery is connected. Isolate mains and battery before servicing. Emergency luminaires require unswitched live connection taken from same phase as switched supply. When unswitched supply is connected status indicator illuminates green, when unswitched supply is disconnected indicator extinguishes and luminaire operates in emergency mode. 24 hour charge period required before undertaking full discharge test. Emergency test sheets provided should be used to record all emergency tests. Batteries should be replaced when 3 hour duration is not met. Excessive switching of permanent live may result in premature battery failure. Battery electrolyte can be harmful to eyes / open wounds, do not puncture, if electrolyte touches skin / eyes flush with water. Do not incinerate batteries.

1. Mounting Plate Dimensions

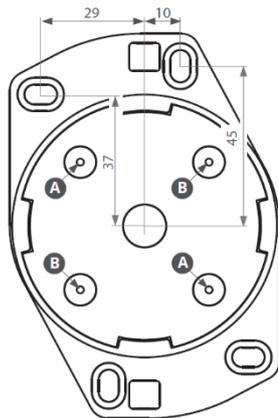

2. Wall Mounting

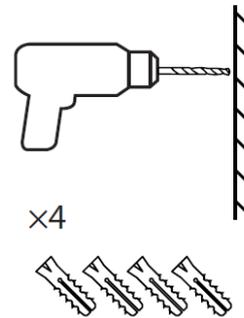


Drill four holes in to the wall according to the mounting plate dimensions and insert wall plugs.

3.




Slice through the silicone seal enough to pass mains cable through. Pass cable through.

4.

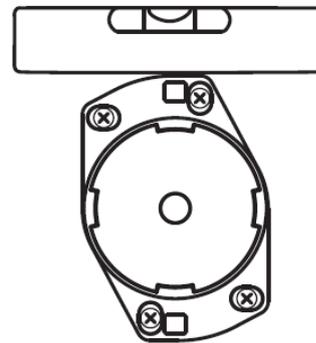


Screw the mounting plate to the wall, using a spirit level to ensure the top edge is horizontal. Continue to step 9.

5. BESA Conduit Mounting

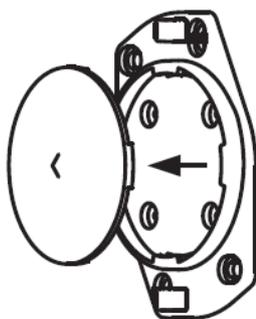


Carefully remove silicone seal from the mounting plate. Do not discard.

6.

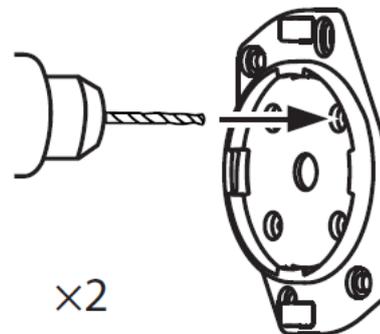


Drill out x2 4mm holes **A** or **B** (refer to diagram) to match the holes on the conduit box.

7.

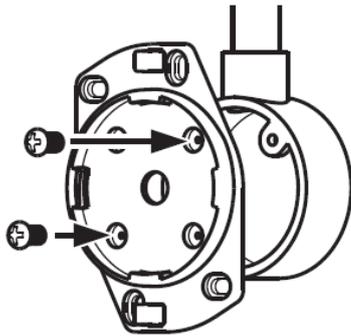


Attach the mounting plate to the conduit box using x2 M4x10mm screws.

8.

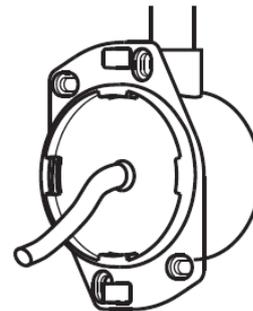

Slice through the silicone seal enough to pass mains cable through. Pass cable through then refit seal to mounting plate.


9.

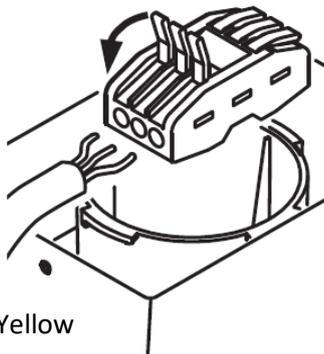

Live – Brown
Earth – Green / Yellow
Neutral - Blue


Strip the mains cable and insert into the connector.

10.

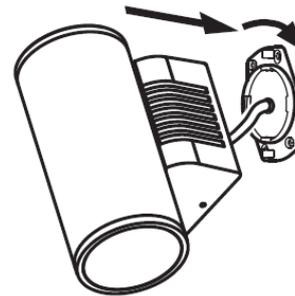

Mount the body onto the mounting plate at approx. 11'oclock position with locking screw hole at bottom. Turn body clockwise to lock into vertical position.

11.

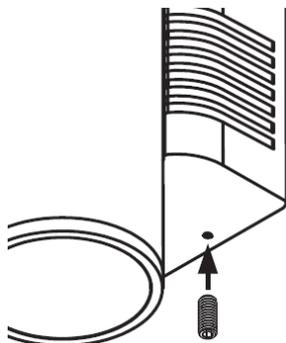

Insert locking screw and tighten with hexagonal key 2mm AF.

12.

Reconnect supply and test.