

# EXI3 M3 LE3/NM3 LE3/M3 LS3 Installation Leaflet

Voltage: 220-240V / 50-60Hz  
 Operating Temperature: 0°C - 40°C  
 IP20



**WARNING - THIS LUMINAIRE MUST BE EARTHED**


This luminaire has been tested and is manufactured to comply with BS EN 60598 : specification for general requirements and tests. It should be installed by a suitably qualified person in accordance with IEE.

**CAUTION:** there is a potential risk of electric shock from the LED boards when the product is operational with the cover removed.

**NOTE:** INSTALLATION AND OPERATION OF THE LUMINAIRE BEYOND ITS SCOPE OF SUPPLY WILL INVALIDATE THE WARRANTY.


**BEFORE** installation, the electrical supply and battery pack **MUST** be disconnected.

1.

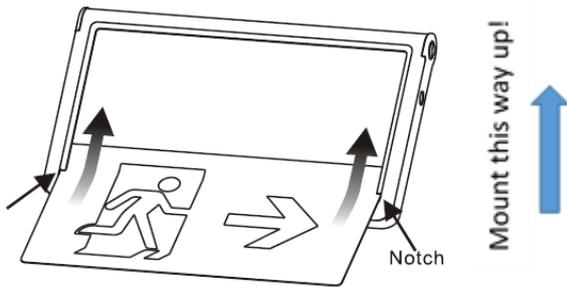


Remove the plastic film from the legend. Locate the notch on the body and slide upwards.

2.

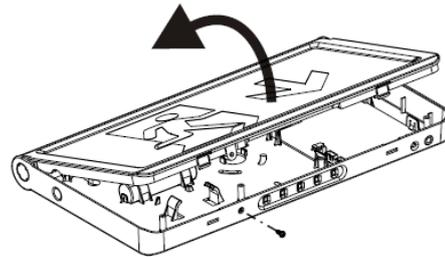


Remove the retaining screw and open the cover.

3.

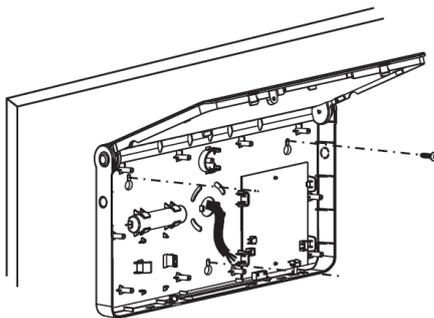


Drill a cable entry hole and two fixing holes in the mounting surface. Use the central hole to feed the cable through and secure the luminaire with the remaining two.

4.

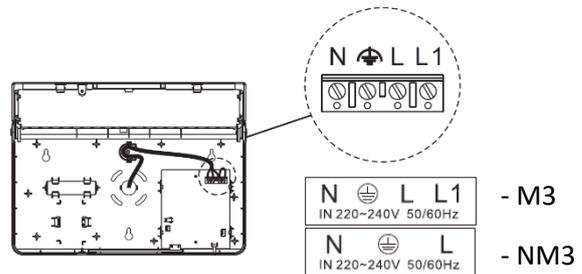

Pass the cable through the cable entry hole, and wire directly into the terminal block. Connect the battery.

5.



Close the cover and secure in place using one screw.

6.

**Self-Test (LS3 only):**

Every month, the luminaire will undergo an automatic test which lasts for 10 minutes. An annual duration test will also occur for a total of 3 hours. The luminaire will return to normal operation once the test has finished.

During testing, the battery is not charging and the red LED indicator will flash continuously.

7.

Reconnect the power supply and check that the green LED indicator is illuminated. This green indicator confirms the battery is charging.

LS3 only:

Any faults with the luminaire will be displayed by a flashing red indicator.

Normal operation - Green indicator

Battery failure - Red indicator, **once every 3 seconds**

Lighting source failure - Red indicator, **twice every 3 seconds**

Less than rated duration time - Red indicator, **three times every 3 seconds**

8.

Do **NOT** cover the luminaire in any way and provide sufficient ventilation.

Installation is now complete.

EMERGENCY LIGHTING TEST RECORD CARD											
LOCATION....			Date Installed...				Installed by...				
TEST	MONTH	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5	
		Signed	Date	Signed	Date	Signed	Date	Signed	Date	Signed	Date
1	FUNCT										
2	FUNCT										
3	FUNCT										
4	FUNCT										
5	FUNCT										
6	FUNCT										
7	FUNCT										
8	FUNCT										
9	FUNCT										
10	FUNCT										
11	FUNCT										
12	3HOUR										