

220-240V / 50-60Hz
IP20



Terminal Labelling:

Power

L1 Switched Live
E Earth
N Neutral

Emergency

L2 Unswitched Live
DA/AT3 DALI Autotest
DA/AT3 DALI Autotest

Dimming

-/D1/DA Analogue/DSI/DALI
+/D2/DA Analogue/DSI/DALI
L3 Switch Dim / Corridor Function



WARNING: Luminaire must be earthed. Risk of electric shock from LED boards if operated with cover removed. Installation / operation outside of luminaires intended scope invalidates warranty. Suitable only for domestic / light industrial / industrial applications within the scope of EN55015. Tested to compliance with BSEN 60598: specification for general requirements and tests. Must be installed by a suitably qualified person in accordance with all relevant legislation. Ambient operating temperature of 0°C to 25°C. If maximum operating temperature is exceeded luminaire will automatically dim / switch off. Terminal blocks are rated to 16A unless stated otherwise. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. **LUMINAIRES WITH EMERGENCY PACK:** When supply is isolated battery output terminals may be live if battery is connected. Isolate mains and battery before servicing. Emergency luminaires require unswitched live connection taken from same phase as switched supply. When unswitched supply is connected status indicator illuminates green, when unswitched supply is disconnected indicator extinguishes and luminaire operates in emergency mode. 24 hour charge period required before undertaking full discharge test. Emergency test sheets provided should be used to record all emergency tests. Batteries should be replaced when 3 hour duration is not met. Excessive switching of permanent live may result in premature battery failure. Battery electrolyte can be harmful to eyes / open wounds, do not puncture, if electrolyte touches skin / eyes flush with water. Do not incinerate batteries.

Maximum Permissible Loads:

Universal 3 circuit track adaptor: maximum weight 10KG.

1M track length: maximum load 60KG.

3M track length: maximum load 90KG

Loads should be evenly distributed across the length of the track.

Universal track system is suitable for 3 circuit, 230 / 240 Volt and 16 AMP. This system is not suitable for inductive loads.

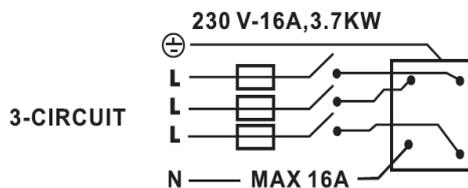
Ensure that all elements of the track system have been correctly assembled, starts and ends must always have the appropriate components to ensure that the run is correctly finished and live conductors are not exposed. Do not exceed maximum loads or allow connection points to subject to twisting forces.

It is the installer's duty to ensure electrical, mechanical and thermal compatibility between the tracks system and any devices attached to it.

Universal 3 circuit adaptor is only suitable for use with the track system supplied.

Track system is only suitable for surface mount or suspension via a rigid drop rod.


1.



1. Remove cover.
2. Connect incoming power cable to terminals as shown in diagram.
3. Replace cover

Where connection is required in a T-junction, corner or joint section the internal wiring must be removed beforehand if the circuit is to form a continuous loop.

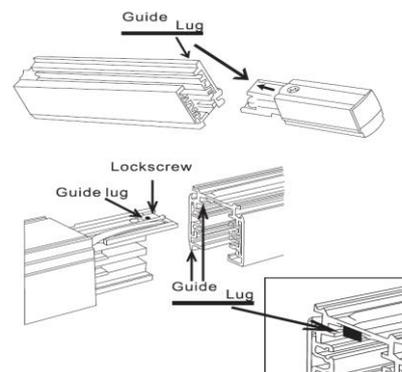
2.



All components of the track system are keyed to prevent incorrect connection. Assemble as per images.

3.





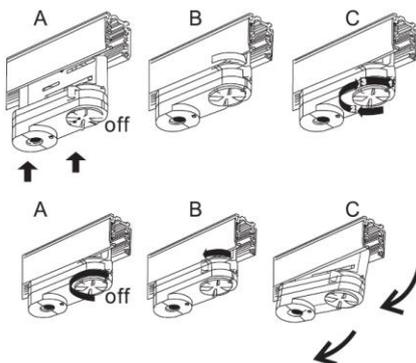
LEFT HAND CONNECTIONS SHOWN, REVERSE FOR RIGHT HAND CONNECTION



4.

1. Ensure selector dial is turn to the off position.
2. Set the locking lever to the side.
3. Engage the adaptor to the track with the guide lug.
4. Turn the lever towards the front until it locks correctly with the track system.
5. Select the circuit by turning the selector dial to 1, 2 or 3.
6. Remove the adaptor by reversing the above process.

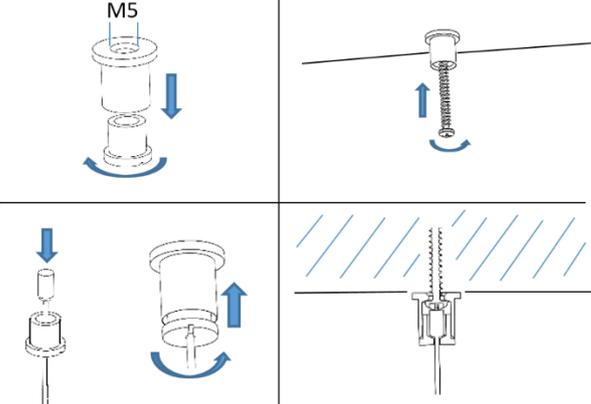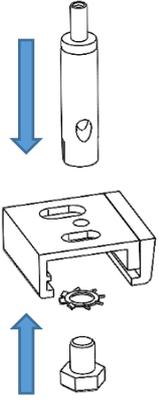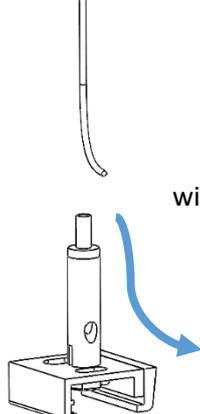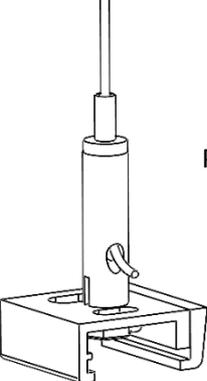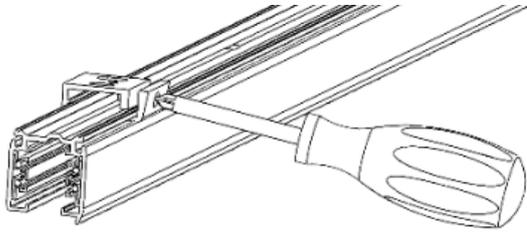Track Light Installation Guide

<p>5.</p> <table border="1" data-bbox="135 347 550 425"> <tr> <td>LOAD RATING</td> <td>15 Kg</td> </tr> <tr> <td>SAFETY FACTOR</td> <td>5:1</td> </tr> </table> 	LOAD RATING	15 Kg	SAFETY FACTOR	5:1	<p>6.</p> 
LOAD RATING	15 Kg				
SAFETY FACTOR	5:1				
<p>7.</p> 	<p>8.</p>  <p>Feed wire through clutch, wire should come out through the side.</p>				
<p>9.</p>  <p>Pull wire through clutch to raise bracket. Cut wire to length</p>	<p>10.</p>  <p>Slide bracket onto track and tighten to secure into place as shown.</p>				
<p>11.</p>	<p>12.</p>				