

220-240V / 50-60Hz
 IP** IK**

Terminal Labelling:
Power

 L1 Switched Live
 E / Earth
 N Neutral


Emergency

 L2 Unswitched Live
 DA/AT3 DALI Autotest
 DA/AT3 DALI Autotest


Dimming

 DA+/D2 Analogue/DSI/DALI
 DA-/D1 Analogue/DSI/DALI
 L3 Switch Dim / Corridor Function



1.

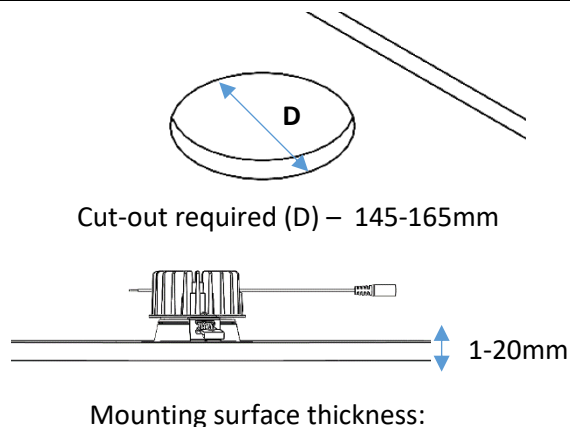


2.

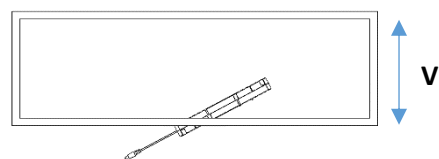


3.

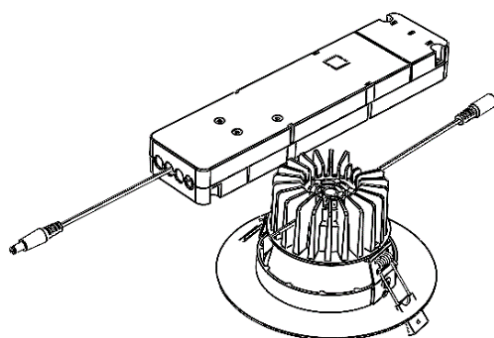

4.

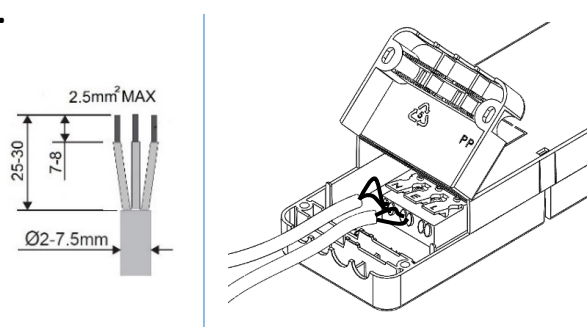

5.

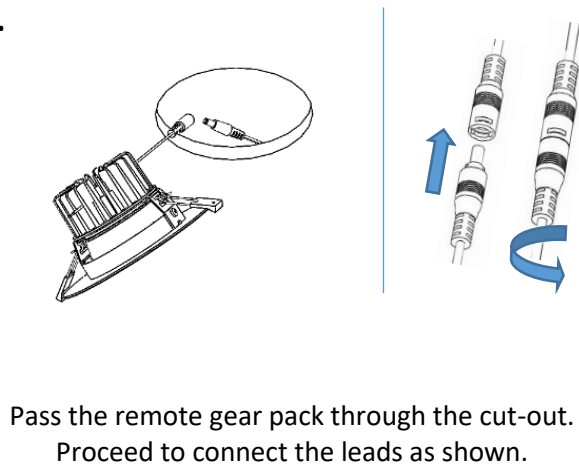

6.

Optional tether

